MAXIM • PACKAGED GAS WATER HEATER

NICKELSHIELD[®] NICKEL-PLATED STORAGE TANK

125 GALLON TANK SERIES

	MODEL NUMBER	20 N 125A-MXS	27 N 125A-MXS	40 N 125A-MXS	54 N 125A-MXG	72 N 125A-MXG	80 N 125A-MXG
	GPH Recovery at 40° to 120° F	245	330	490	670	900	1000
	GPH Recovery at 40° to 140° F	195	260	390	540	720	800
	Input Btu/h	199,000	270,000	399,000	540,000	720,000	800,000
*	Min. inlet flow gas pressure " W.C.	5.5	5.5	5.5	4.5	4.5	4.5
*	Max static gas pressure "W.C.	9	9	9	14	14	14
А	Cold Inlet - NPT	2	2	2	2	2	2
В	Hot Outlet - NPT	2	2	2	2	2	2
С	Drain - NPT	1	1	1	1	1	1
D	I - Beam Skids	3 x 34-1/2					
Е	Overall Depth	45	45	45	53	52	54
F	Overall Height	75	75	75	82	82	82
G	Flue Outlet Diameter	5	6	7	8	10	10
Н	Gas Inlet - NPT	1/2	3/4	3/4	1	1-1/4	1-1/4
J	Motor HP 120 V, 1Ø, 60 Hz.	1/6	1/6	1/6	1/3	1/3	1/3
Κ	Motor Amps	1.75	1.75	1.75	8	8	8
L	Height to Outlet	65	65	65	73	73	73
Μ	Height to Inlet	28	28	28	36	36	36
	Approx. Shipping Weight - Ibs	1020	1070	1130	1260	1370	1390

ASHRAE 90.1 compliant.

Models with suffix "MXS" are registered as low NOx water heaters in California and Texas

The information presented is for natural gas 0.6 S.G. - For operation with propane (LP gas), consult the factory.


For gas pressures outside of this range, consult factory.

Dimensions are in inches unless otherwise specified.

For standard and optional equipment, see form # PV 6137.

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND

SPECIFICATION WITHOUT NOTICE.

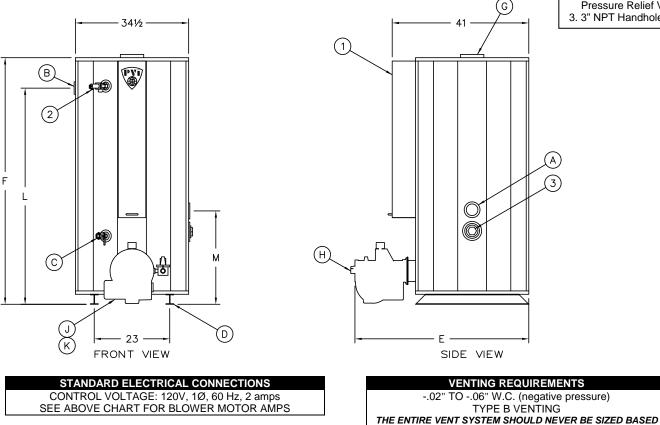

- 1. Control Enclosure
- 2. ASME Temperature &
- Pressure Relief Valve
- 3. 3" NPT Handhole

Product is patented in the U.S., Canada, and Mexico.

UPON THE VENT CONNECTION DIAMETER EXCLUSIVELY. FOR PROPER VENT SIZING, CONSULT THE NATIONAL FUEL

GAS CODE UNDER "FAN-ASSISTED"

